


Premier

THREE PHASE TRANSFORMER

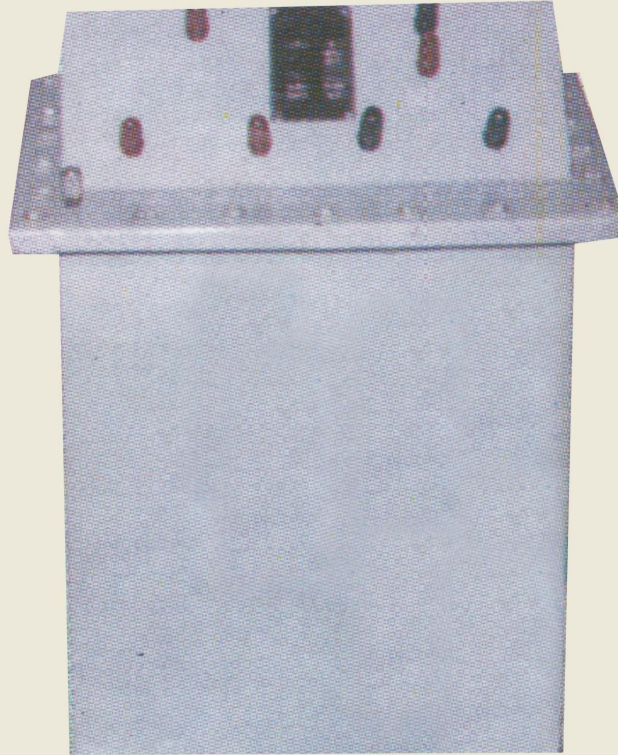

A laboratory type model for conducting various experiments

SPECIFICATIONS

- ▶ Capacity 3 phase, 1 / 2/ 3/ 5 KV A, 440 / 230 Volts, 50 Hz
- ▶ Delta - Star connection ▶ Shell type - Oil cooled
- ▶ Totally enclosed, maximum ambient temp 45degree C
- ▶ Insulation Class 'B' ▶ Copper Wound
- ▶ Tapping on Primary and Secondary Side : 50%, 86.6% and 100%
- ▶ Bakelite insulated banana terminals 30 A, with colour code provided on the top of the transformer and on 12 mm bakelite sheet
- ▶ The tank provided with oil filling Hole with cap, oil level indicator drain plug and earth terminal
- ▶ Plain unidirectional MS Roller fitted to the tank for movement
- ▶ Electrical performance would confirm to IS : 2026 or latest
- ▶ The transformer provided with transformer oil. The oil confirms to IS : 335 or latest

Circuit Diagram, Instruction & Operation Manual provided with the machines.

Premier Enterprise, Ahmedabad